

60W Open Frame Dual Output Power Supply

NAD-601X Series

Feature:

- 90 to 264Vac universal input range.
- UL, CSA, TUV safety approval..
- EMI/RFI meet VDE & FCC limit B.
- Low cost & compact size.
- 60Watts in 127 × 76 × 42mm Size.
- 2 Year Warranty.

Specifications: typical at nominal line, full load at 25 ° C.

Input Specifications:	General Specifications:
Input voltage: 90 to 264Vac	Efficiency: 70% typical at full load
Input Frequency: 47 Hz to 440Hz	Hold-up time: 20ms @ 110Vac full load
Input inrush current: 18A at 115Vac 36A at 230Vac	EMI/RFI: VDE & FCC Class B limits
Earth leakage: 0.2mA max @ 110VAC 0.4mA max @ 230VAC	Dielectric Withstand: Input/output: 3000VAC Input/Ground: 1500VAC
Output Specifications:	Safety Approval: UL UL1950 CSA 22.2-234/950 TUV EN60950
Output Rating: See Rating Charts	
Line Regulation: ±1% max	
Load Regulation: ±1% max.	Switching frequency: 20kHz
Transient Response: ±1% max.dev. (Full to half load) 500uSec recovery	Weight: 350g
Temperature Coefficient: ±0.02% / °C	MTBF: 100,000hours(MIL-HDBK-217F)
Ripple & Noise: 1% P-P max	Environmental Specifications:
Protections: a. Over current protection b. Over voltage protection c. Over power protection d. Short circuit protection	Operating temperature: 0 to +50°C
	Storage temperature: -40 to +85°C
	Humidity: 5 to 95 % RH non-condensing
	Vibration: 2.4G , 5 to 500Hz
	Cooling: Free air convection

Note:

1. Other output voltage versions available. Consult factory for details.
2. Vibration test: Three orthogonal axes, random vibration, 10 minutes for each axis.
3. Maximum output power is 60W.

60W Open Frame Dual Output Power Supply


NAD-601X Series

Model No.	Vo1		Vo2		Max. Power
	V/A	PEAK	V/A	PEAK	
NAD-6011	+5V/8A	10A	-5V/1A	1A	60W
NAD-6012	+5V/8A	10A	+12V/1.5A	2A	60W
NAD-6013	+5V/8A	10A	-12V/0.5A	1A	60W
NAD-6014	+5V/8A	10A	+15V/1.2A	2A	60W
NAD-6015	+5V/8A	10A	-15V/0.5A	1A	60W
NAD-6016	+5V/8A	10A	24V/0.5A	1A	60W

* At least 20% of load is required to obtain stable regulation.

* Peak Output less than 60 Sec. Peak current can't be drawn from all output at same time.

Dimensions: mm±0.5mm

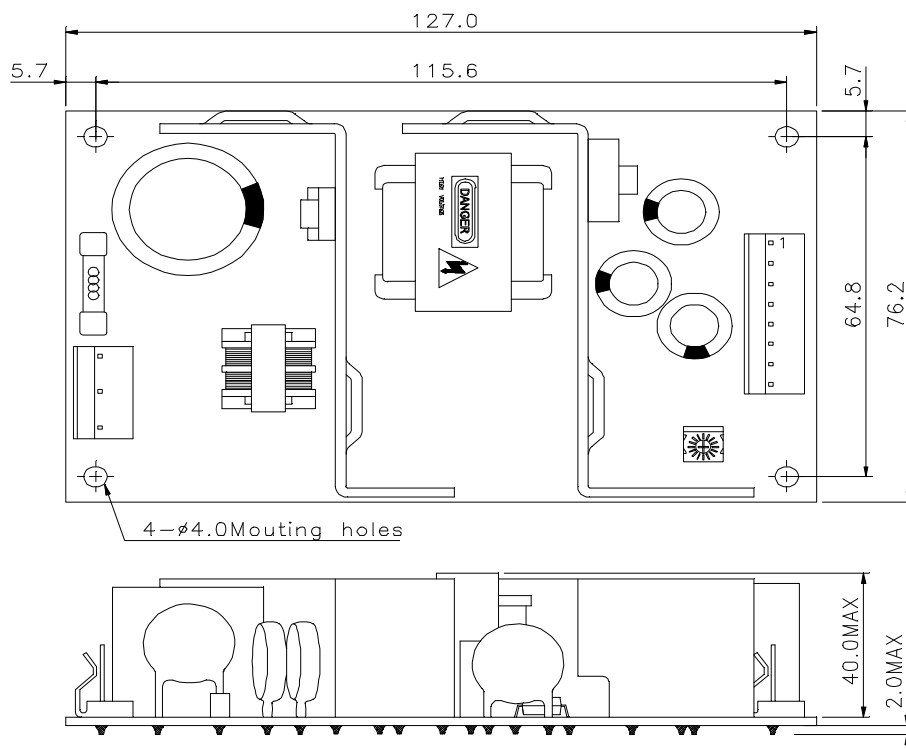

DC Output Pin Functions	
Pin 1	Vo2
Pin 2,3,4	Vo1
Pin 5,6,7,8	com

- DC output mating connector is Molex 09-91-0600
- AC input mating connector is Molex 09-953-031